


LOR-220 SMF/MMF

High Resolution Optical Time-Domain Reflectometer

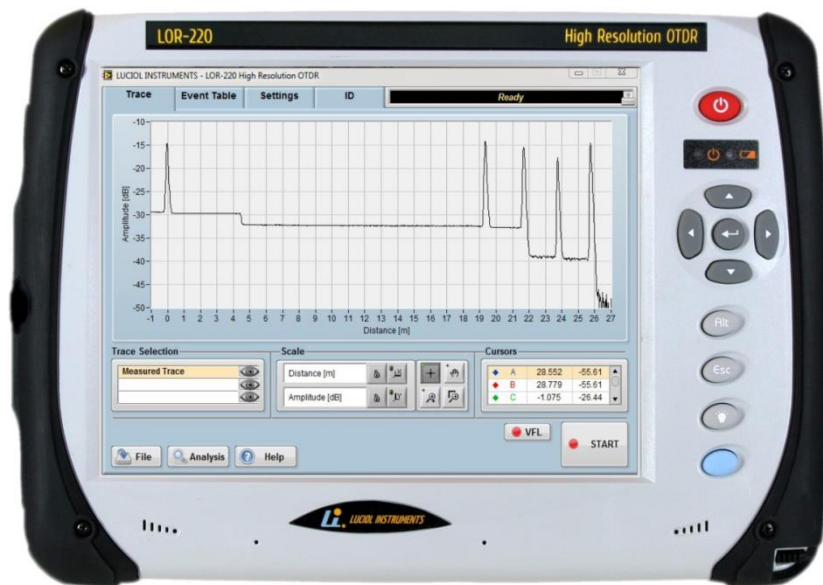

Dual output
SMF and MMF

Industry-leading
resolution (1 ns
pulses)

Fully portable OTDR
format

High dynamic range
with short pulses

Measures IL and
ORL for all types of
connectors

1625 nm option

Up to four
wavelengths
(1000-1650 nm)

Custom systems for
most fiber types
and wavelengths

Patented design; US
patent # 7,593,098

The LOR-220 from Luciol Instruments is a fully portable high resolution OTDR. It is similar in shape and feel to a standard OTDR, but achieves unprecedented resolution. The LOR-220 distinguishes events with 10 cm separation and has a 40 cm attenuation deadzone. Its unique dynamic range (> 12 dB for the 1 ns pulse-width) enables to see through optical splitters, even over very short distances.

APPLICATIONS

- See and localize events, which no other OTDR can show, such as weak reflections or attenuations immediately after a larger reflection or an optical splitter.
- Fiber optic sensors and fiber assemblies.
- Fiber manufacturing and verification.
- Insertion loss and return loss testing for optical components.
- Aviation and aerospace.
- And more...



SPECIFICATIONS

Optical

Standard wavelength options* (± 20 nm):
1310 nm; 1550 nm; 1625 nm

Standard fiber types*:

Single Mode (9/125 μ m)
Multimode (50 or 62.5/125 μ m)

Optical connector:

Universal, APC or PC type, with FC, SC or ST adapter

Optical pulse widths: 1 ns

Measurement Range:

1.25, 2.5, 5, 10, 20, 40, 80, 160 km

Distance units:

kilometer, meter, feet, miles, time(ns)

Sampling resolution:

Any multiple of 2.5 cm (250 ps)

Dynamic Range¹:

Rayleigh backscattering²:
> 14 dB (S/N =1)

Deadzones¹:

Event deadzone: 10 cm
Attenuation deadzone³: 40 cm

Distance accuracy:

$\pm (10 \text{ mm} + 5 \times 10^{-5} \times [\text{fiber length}])$

Reflectance accuracy¹: ± 1.5 dB

Loss accuracy⁴: ± 0.1 dB ± 0.02 dB/dB

Hardware

OS: Windows 10 Home

Processor: Intel N4200

RAM: DDR3L, 4 GB

Storage: SSD, 120 GB (more optional)

Display: Touchscreen TFT 10.4" (800x600)

Interfaces: 2x Ethernet RJ45
4x USB 3.0
1x HDMI
1x Headphone/Microphone

Wifi/Bluetooth (optional)

Power rating: 15V/4 A

Power input: AC operation with 100 to 240 VAC;
50/60 Hz universal adapter; DC operation on
batteries (Li Ion, 6.2 Ah)

Battery operating time: 5 h

Battery charging time: 3.5 h

Size: 320 x 240 x 90 mm, Weight: 3.1 kg

Environmental

Operating temperature: 0° to +40°C (32° to 104° F)

Storage temperature: -20° to +60° (-4° to 140°F)

Relative humidity: $\leq 80\%$ (0 to 30°C), decreasing
linearly to 50% at 40 °C

Maximum operation altitude: 2000 m

Pollution degree: 2

OPTIONS AVAILABLE

-FSV

Fiber microscope

End-face verification of connectors, USB
connection, Video displayed on LOR screen.

ORDERING INFORMATION

LOR-220

LOR-22X-SMF/W1-MMFTT/W2-CC/CC;

X= # of wavelengths;

TT= fiber type: 62 for 62.5/125
50 for 50/125

W1, W2...: wavelengths with source type (FP or
LED)

CC= connector type: ASC, AFC, SC, FC, ST.

Ordering example:

LOR-222-MMF62/SMF-1310FP/1550FP-FC/AFC
LOR-220 with one MMF62.5/125 channel (FC/PC)
with 1310nm FP laser source and one SMF channel
(FC/APC) with 1550 nm laser source.

*Other wavelengths and configurations are
available on a custom basis. Contact the factory
with your special requirements.

Notes:

1: Typical

2: At a wavelength of 1310 nm

3: For ORL = 45 dB

4: For a LED source (or FP under specific conditions)

Luciol Instruments SA - 7B Route Suisse - 1295 Mies - Switzerland.

Tel : +41 22 755 56 50

Mail : info@luciol.com

Web : www.luciol.com